

Aluminium Multifar rivets




Directive references

There is no reference specification.

Description


Thanks to its particular way of deforming, the multifar rivet can be fastened on various grip ranges and one rivet length only can be used to replace several standard rivets of different lengths. Moreover, it is able to compensate for ovalized and/or oversized holes. This type of rivet can be used also with soft or fragile materials, such as plastic, aluminium and composite materials, without damaging them during the fastening.



Minimum
Thickness

Medium
Thickness

Maximum
Thickness

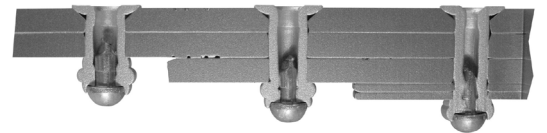

Materials

BUSH

AlMg 2,5 EN AW 5052 - UNI EN 573 - 3:1996 EC:2000

NAIL

Steel

Surface treatments

NAIL

White zinc plated with Cr III